

FINAL REPORT

ISO 15985: 2014

Plastics -- Determination of the ultimate anaerobic biodegradation under high-solids anaerobic-digestion conditions -- Method by analysis of released biogas

ENVIRONMENTAL DIVISION LABORATORY, MUMBAI

INTERTEK INDIA PRIVATE LIMITED

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000

Client: [REDACTED]

Sample Registration Date: 19/01/2021

Analysis starting date: 19/01/2021 (pre-conditioning) **Analysis completed on:** 30/09/2021

Name of product: NORMAL PET BOTTLE + LIDS
Laboratory Ref. Code 13739805
PET + BIOSPHERE (1%) (NO LID)
Laboratory Ref. Code 13739806

Quantity received and packing: 500gms packing

Sample details: NORMAL PET BOTTLE + LIDS

PET + BIOSPHERE (1%) (NO LID)

Test Required ISO 15985:2014 Plastics -- Determination of the ultimate anaerobic biodegradation under high-solids anaerobic-digestion conditions -- Method by analysis of released biogas

Sampling done by: Sample not drawn by Intertek

Report No. MUM/000183C/2021

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms>/or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000



LABORATORY

Testing as presented in this report was conducted by Environmental division of Intertek India Private Limited. The testing facility is located at F wing, 2nd Floor, Chandivali Saki vihar Road, Andheri (East), Mumbai – 400 072, India.

SAMPLE RECEIPT

The samples Normal PET bottle + Lids & PET + Biosphere (1%) (No Lid), were received on 19/01/2021 at the Intertek testing facility. The sample was sent through courier. Sample was at ambient temperature in good condition with no evidence of damage or contamination. No temperature preservation was required.

SAMPLE DESCRIPTION:

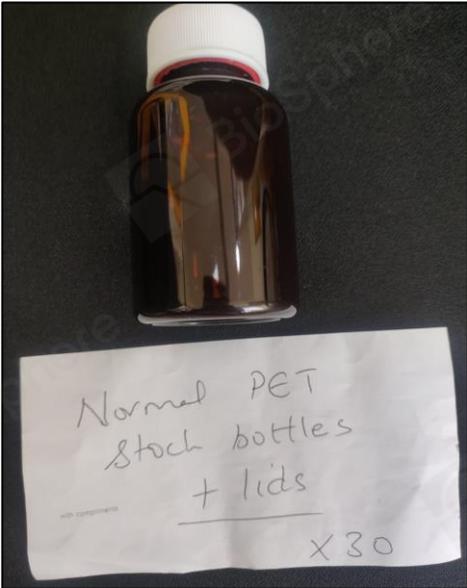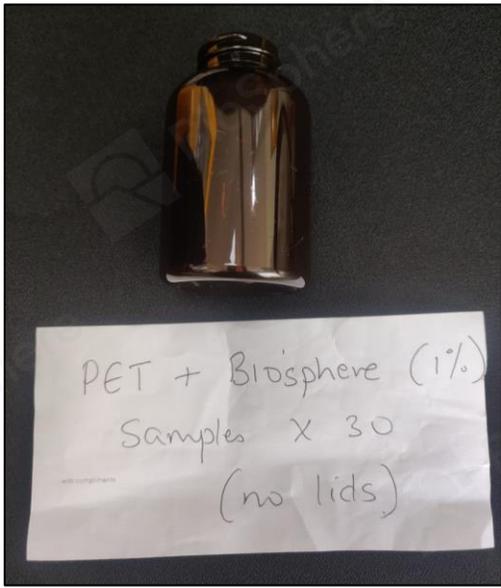	
<p>Normal PET bottle + Lids</p>	<p>PET + Biosphere (1%) (No Lid)</p>

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

<p>IPL/17025/ENV/QF/7.8/01-03</p>	<p>Issue No.: 01 Issue Date.: 16.12.2019</p>	<p>Amend No.: 00 Amend Date.: 00.00.0000</p>
-----------------------------------	--	--

PROJECT DESCRIPTION:

Normal PET bottle + Lids & PET + Biosphere (1%) (No Lid), samples were submitted by [REDACTED] [REDACTED] for testing under standard ISO 15985:2014. This test method covers the determination of the degree and rate of anaerobic biodegradation of plastic materials in high-solids anaerobic conditions. The test materials are exposed to a methanogenic inoculum derived from anaerobic digesters operating only on pretreated household waste. The anaerobic decomposition takes place under high-solids (more than 30 % total solids) and static non-mixed conditions. This test method is designed to yield a percentage of conversion of carbon in the sample to carbon in the gaseous form under conditions found in high-solids anaerobic digesters, treating municipal solid waste.

INOCULUM COLLECTION AND CONDITIONING

The anaerobic digested sewage sludge (Figure 2) mixed with household waste was obtained from the Chembur (Mumbai). To make the sludge adapted and stabilized during a short post-fermentation at 53°C, the sludge was pre-incubated (one week) at 53°C. This means that the concentrated inoculum was not fed but allowed to post ferment the remains of previously added organics allowing large easily biodegradable particles were degraded during this period and reduce the background level of biogas from the inoculums itself.



Figure 2: Anaerobic microbial inoculum

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01 Issue Date.: 16.12.2019	Amend No.: 00 Amend Date.: 00.00.0000
----------------------------	--	--

INOCULUM PROPERTIES

A sample of the anaerobic digested sewage sludge was analyzed for pH, percent dry solids, and volatile solids, as well as, the amount of CO₂ and CH₄ evolution during the testing. Table 1 lists the results of this initial testing.

METHODOLOGY:

Inoculum Medium: Remove enough inoculum (approximately 15 kg) from the post-fermentation vessel and mix carefully and consistently by hand in order to obtain a homogeneous medium. Test three replicates each of a blank (inoculum only), Positive control (Reference material) (thin-layer chromatography cellulose), negative control (optional), and the test substance being evaluated.

Manually mix 1000 g wet weight (at least 20 % dry solids) of inoculum in a small container for a period of 2 to 3 min with 15 to 100 g of volatile solids of the test substance or the controls for each replicate. For the three blanks containing inoculum only, manually mix 1000 g of the same inoculum in a small container for a period of 2 to 3 min with the same intensity as was done for the other vessels containing test substance or controls. Determine the weight of the inoculum and test substance added to each individual Erlenmeyer flask accurately. Add the mixtures to a 2-L wide-mouth Erlenmeyer flask and gently spread and compact the material evenly in the flask to a uniform density.


After placing the Erlenmeyer flask in incubator, connect it with the gas collection device. Incubate the Erlenmeyer flasks in the dark or in diffused light at 52°C (62°C) for thermophilic conditions, The incubation time shall be run until no net gas production is noted for at least five days from both the Positive control (Reference material) and test substance reactors. Control the pH of the water used to measure biogas production to less than two by adding HCl.

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01 Issue Date.: 16.12.2019	Amend No.: 00 Amend Date.: 00.00.0000
----------------------------	--	--

ANAEROBIC DIGESTER SETUP FOR THE PLASTIC BIODEGRADATION

The biodegradation testing of sample was performed in the digester as shown in the (Figure-3).

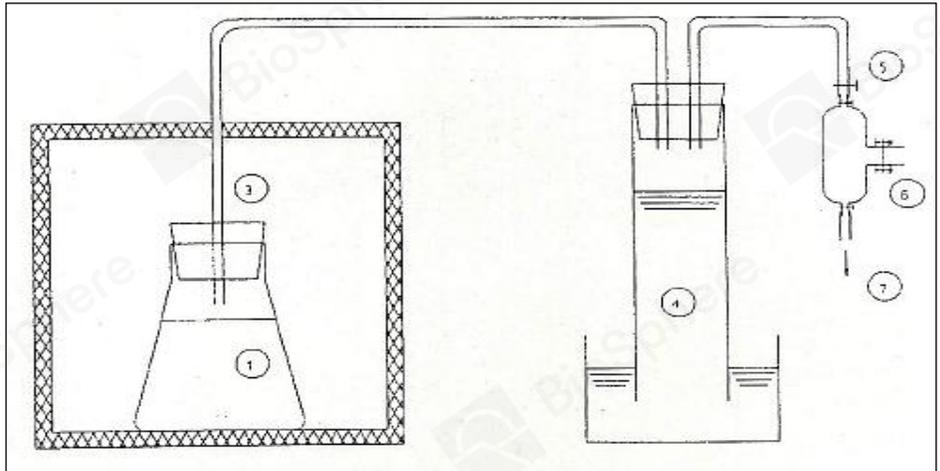

1. Digester
2. Incubator
3. Gas outlet
4. Gas collector
5. Valve
6. Gas Sampling
7. Gas Discharge

Figure-3: Digester setup

RESULT:

The most important biochemical characteristics of the inoculum such as pH, Volatile Fatty Acids, NH₄⁺-N— and dry solids were studied.

Table 1: Results of Initial testing of the anaerobic digested sewage sludge

Parameters	Requirement	Actual results
pH	7.5 to 8.5	7.52
Kjeldahl nitrogen	0.5 to 2 g/kg wet weight	1.40
Dry Solids at 105 °C	>20%	42.50
Volatile Solids at 550 °C	Below 1 g/kg wet weight	0.75

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms>/or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000

The biogas volume in the gas sampling bag was measured (Table- 2). Presence of gas in the gas collector of Positive control (Reference material) indicated that the inoculum was viable and gas displacement was observed both in Positive control (Reference material) and Test Sample.

ISO 15985 states that for the test to be considered valid, the positive control (Reference Material) must achieve more than 70 % biodegradation after 15 days with deviation less than 20% of the mean between the replicates.

Positive control (Reference material) showed 70.68% on 28th day with less than 20% of the mean difference between the replicates.

The gas displacement observed after 135 days is as shown in the table below.

Table-2: Biogas volume of the evolved gas during the biodegradation process at 135 days

Biodegradation Test	Total Volume 135 days (mL)
Inoculum	4180
Positive control (Reference material)	11390
Normal PET bottle + Lids	4450
PET + Biosphere (1%) (No Lid)	7260

Colonization of bacteria at some places were observed under the microscope (Fig-4). This shows the process of biodegradation has begun.

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000

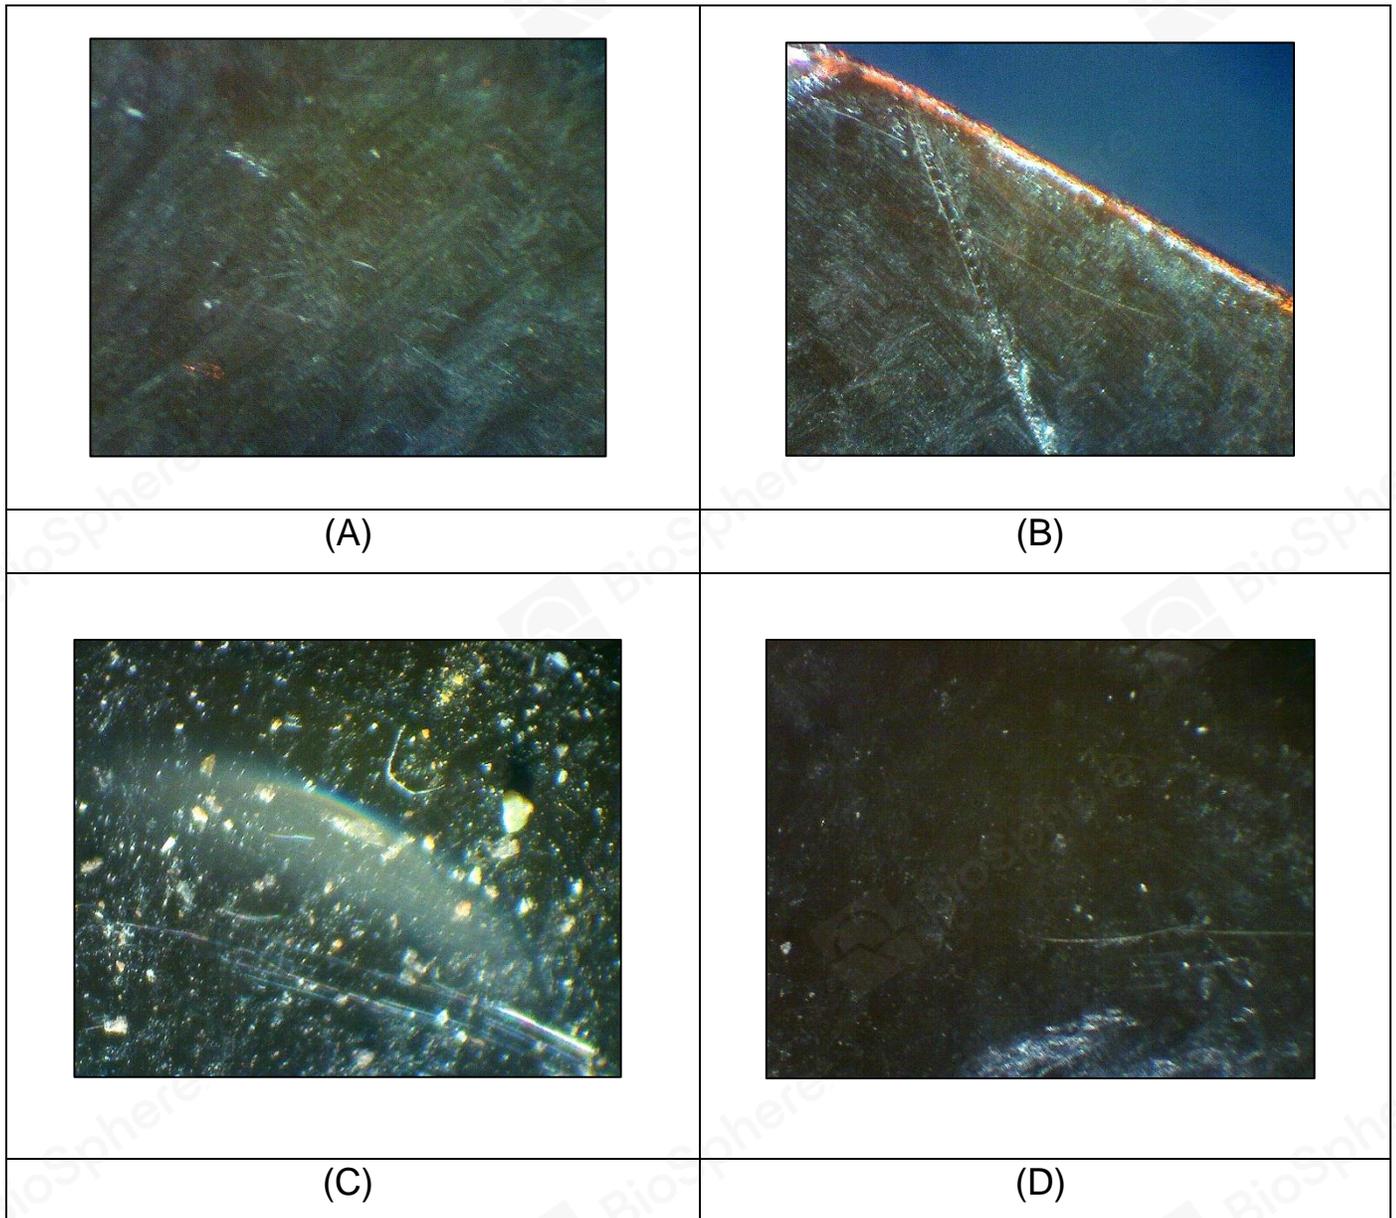


Figure 4a: Microscopic image of Test samples Before and After 135 days Incubation Condition

A & B – Unexposed Test Sample NORMAL PET BOTTLE + LIDS to anaerobic biodegradation process
C & D – Exposed Test Sample NORMAL PET BOTTLE + LIDS to anaerobic biodegradation process

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01 Issue Date.: 16.12.2019	Amend No.: 00 Amend Date.: 00.00.0000
----------------------------	--	--

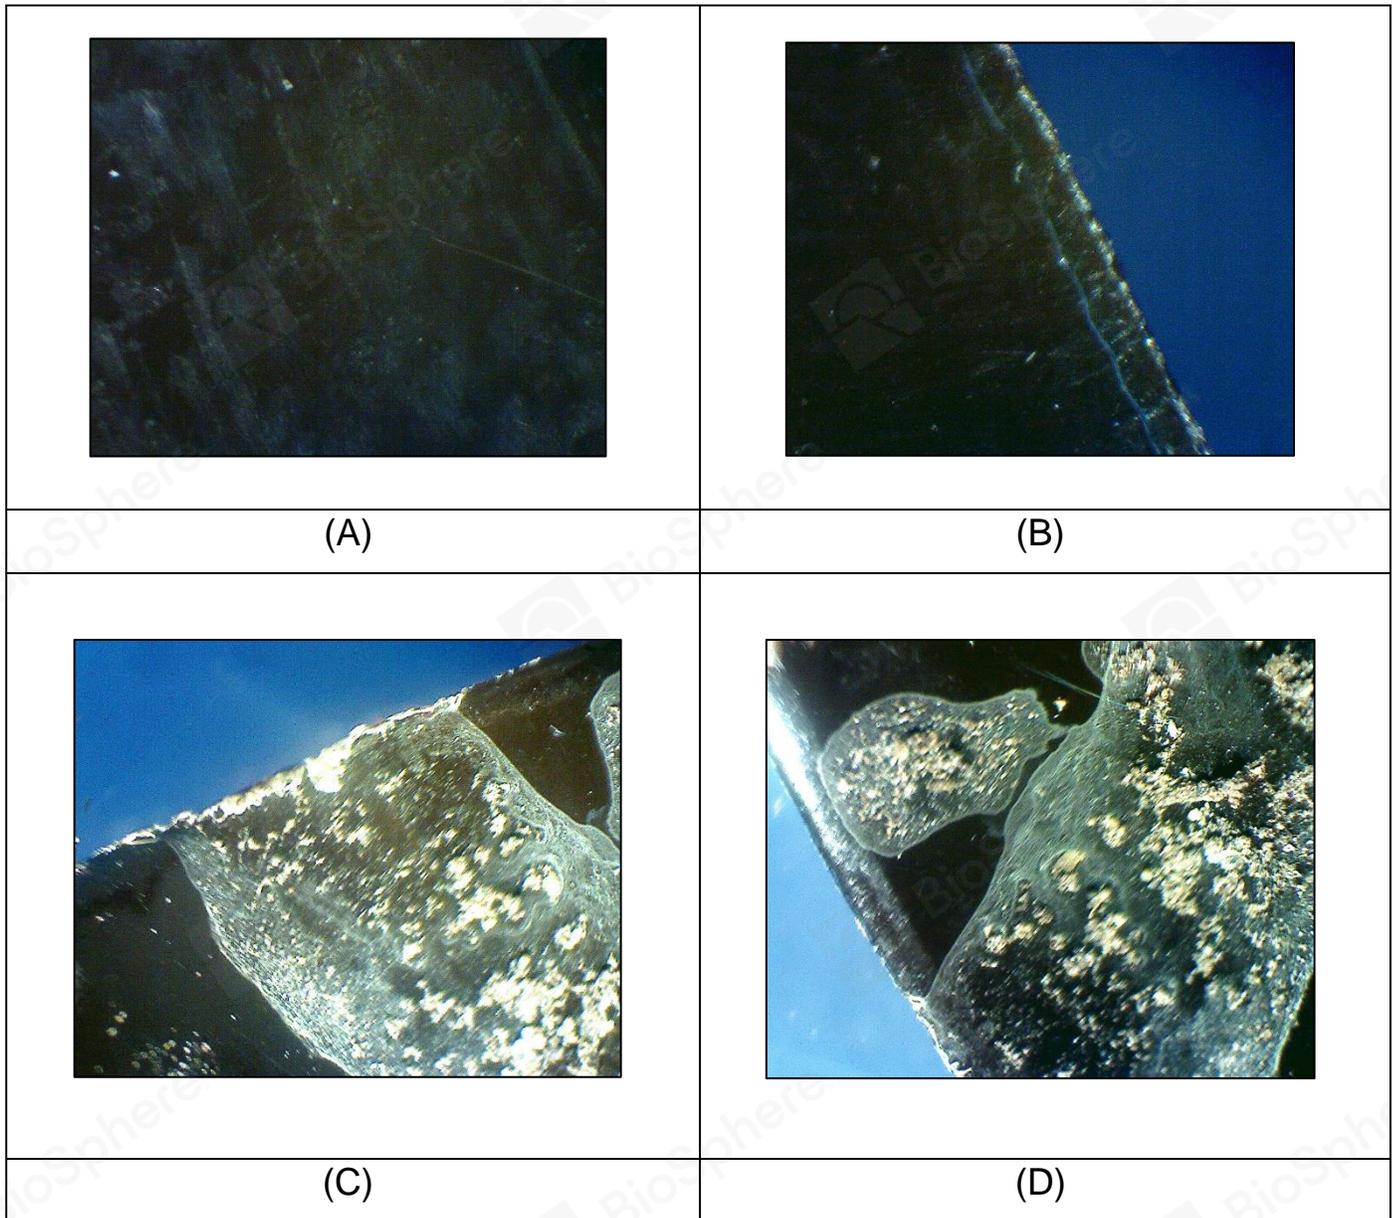


Figure 4a: Microscopic image of Test samples Before and After 135 days Incubation Condition

A & B – Unexposed Test Sample PET + Biosphere (1%) (No Lid) to anaerobic biodegradation process
C & D – Exposed Test Sample PET + Biosphere (1%) (No Lid) to anaerobic biodegradation process

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01 Issue Date.: 16.12.2019	Amend No.: 00 Amend Date.: 00.00.0000
----------------------------	--	--

The percent biodegradation of Positive control (Reference material) and Test sample was calculated by the measured cumulative carbon dioxide and methane production from each flask after subtracting carbon dioxide evolution and methane evolution from the blank samples at the end of 135 days of testing. Calculations were based on Total Organic Carbon obtained of both Positive control (Reference material) and Test sample.

Table-3: Percentage biodegradability of Test sample with respect to Positive control (Reference material) Cellulose.

Group	Inoculum control	Positive control (Reference material)	Normal PET bottle + Lids	PET + Biosphere (1%) (No Lid)
Weight	1000 ml	10.2012	10.4981 g	10.1360 g
Total volume (ml)	4180.00	11390.00	4450.00	7260.00
% CH ₄	16.00	48.40	16.80	24.90
Volume of CH ₄ (ml)	668.80	5512.76	747.60	1807.74
weight of CH ₄ (g)	0.4387	3.6164	0.4904	1.1859
% CO ₂	18.00	48.90	18.10	35.30
Volume of CO ₂ (ml)	752.40	5569.71	805.45	2562.78
Weight of CO ₂ (g)	1.4898	11.0280	1.5948	5.0743
Total weight of carbon in grams	0.7313	5.6898	0.7984	2.2595
Theoretical weight of carbon in grams (Ci)	-	4.2916	6.6117	6.2235
Biodegradation	-	1.1554	0.0102	0.2456
% Biodegradation	-	100.00	1.02	24.56

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000

Table 4a: Percent weight loss of Normal PET bottle + Lids sample.


Average Initial Weight (grams)	10.4981
Average Final Weight (grams)	10.4981
Percent Weight Loss (%)	0.00

Table 4b: Percent weight loss of PET + Biosphere (1%) (No Lid) sample.

Average Initial Weight (grams)	10.1360
Average Final Weight (grams)	8.0012
Percent Weight Loss (%)	21.06

The Percent weight loss was calculated based on the initial weight and final weight of the test sample after the 135 days study.

Biodegradation of the samples determined based on conversion of carbon from the test material to carbon in the gaseous phase (CH₄ and CO₂) can be observed in graph 1 and graph 2a ,2b & 2c.

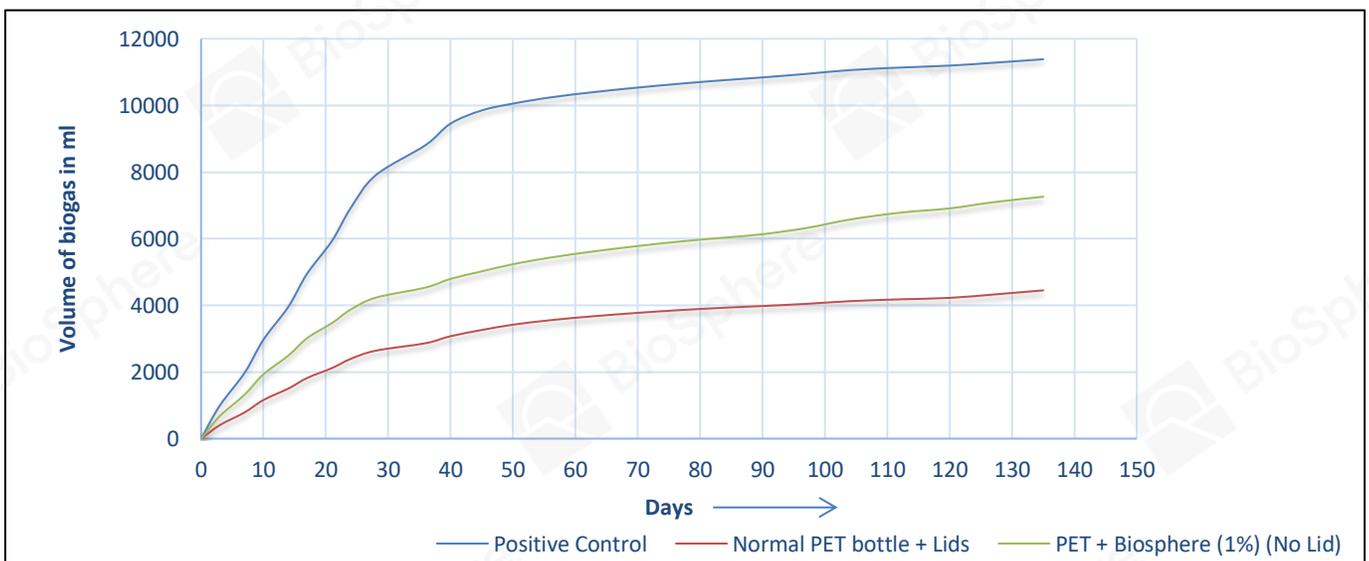


Graph-1: Plot showing Net Biogas Production from Test sample (Normal PET bottle + Lids & PET + Biosphere (1%) (No Lid)) and Positive control (Reference material- Cellulose)

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000




Graph-2a: The percent biodegradation of the Positive control (Reference material- Cellulose) determined based on conversion of carbon from cellulose to carbon in the gaseous phase (CH₄ and CO₂)

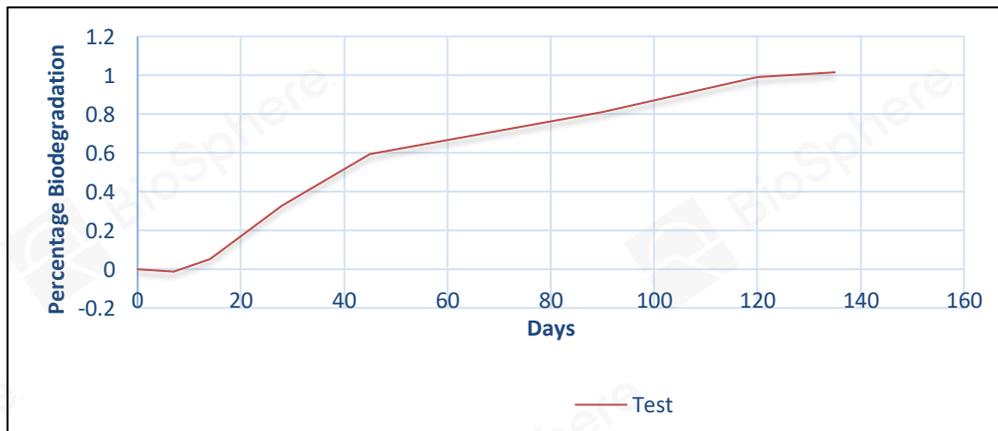

Graph-2b: The percent biodegradation of the Test sample (Normal PET bottle + Lids Sample) determined based on conversion of carbon from the Test material to carbon in the gaseous phase (CH₄ and CO₂)

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

IPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000

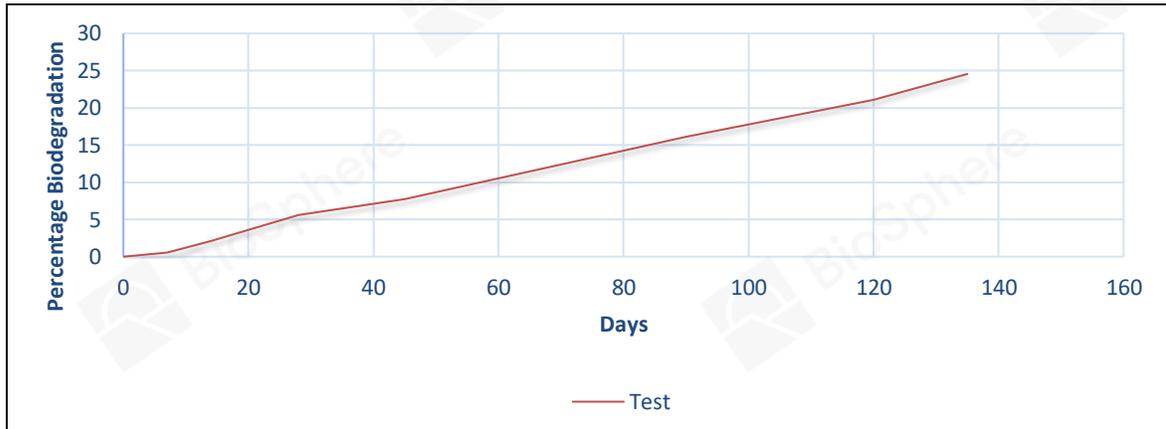

Graph-2c: The percent biodegradation of the Test sample (PET + Biosphere (1%) (No Lid) Sample) determined based on conversion of carbon from the Test material to carbon in the gaseous phase (CH₄ and CO₂)

CONCLUSION:

Considering the cumulative gas production as observed in Table 2 & 3 and its analysis indicates that the process of biodegradation has occurred in **PET + Biosphere (1%) (No Lid) Sample**. After 135 days of incubation, the level of biodegradation for the Positive control (Reference material) was **100 %** while the **Normal PET bottle + Lids Sample & PET + Biosphere (1%) (No Lid) Sample** submitted by [redacted] showed **1.02 & 24.56 %** respectively.

----- End of Report -----

Authorized Signatory

**Dhanashree Bhelose
Business Development Manager**

Note : The results reported relate to the sample tested only. The Test Certificate shall not be reproduced in full or part without the written permission of INTERTEK. The sample(s) has been not drawn/sampled by INTERTEK LAB. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and / or shipment and only relate to the sample(s) as received and tested. This report was prepared solely for the use of the client named in this report. **Intertek** disclaims any and all liability for damage or injury which results in the use of the information contained herein and accepts no responsibility for any loss, damage or liability suffered by a third party as a result of any reliance upon or use of this report. All jobs are performed as per Intertek terms & Conditions available at <http://www.intertek.com/terms> or can be made available on request

HPL/17025/ENV/QF/7.8/01-03	Issue No.: 01	Amend No.: 00
	Issue Date.: 16.12.2019	Amend Date.: 00.00.0000